




# ELEGANCE

Wall and ceiling axial fans  
**Linea Design**




Complies with ErP Directive 2009/125/CE and EU Regulation 1253/2014  
Classification: Residential Ventilation Unit

- To exhaust air directly to the outside or into a short length ducting (max 3 m length).
- Suitable for toilets, bathrooms, WC's, shower-rooms, utility rooms and kitchens.
- Innovative design with flat cover and lateral intake.
- Provided with ball bearing motor long Life 30.000 hours and backdraught shutters.
- Advanced profile which optimizes the fluid dynamic performance of the fan.




Lateral intake on the whole perimeter

## INSTALLATION



WALL

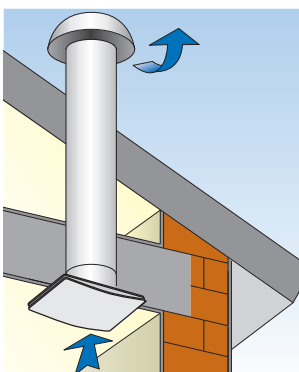

CEILING



## PERFORMANCE

| MODELS                                      | PROTECTION | m <sup>3</sup> /h | l/s     | Pa      | W       | dB(A)*      |
|---|------------|-------------------|---------|---------|---------|-------------|
| <b>Base - Timer - Pull cord - MHY smart</b> |            |                   |         |         |         |             |
| ELEGANCE 100                                | IPX4       | 90                | 25      | 41      | 14      | 31,4        |
| ELEGANCE 120                                | IPX4       | 165               | 46      | 54      | 15      | 36,7        |
| ELEGANCE 150                                | IPX4       | 315               | 87      | 70      | 25      | 43,9        |
| <b>Comfortimer - 2 V</b>                    |            |                   |         |         |         |             |
| ELEGANCE 100                                | IPX4       | 90 / 58           | 25 / 16 | 41 / 20 | 14 / 6  | 31,4 / 27,4 |
| ELEGANCE 120                                | IPX4       | 165 / 103         | 46 / 29 | 54 / 20 | 15 / 8  | 36,7 / 28,4 |
| ELEGANCE 150                                | IPX4       | 315 / 182         | 87 / 50 | 70 / 15 | 25 / 13 | 43,9 / 29,5 |

\* Lp(A) measured at 3m in open field 230V-50Hz.

## VERSIONS



**BASE** - On/off through light or remote control switch



**PULL CORD** - On/off through pull cord switch



**TIMER** - Integral electronic timer adjustable from 3 to 25 minutes



**CMT - COMFORTIMER** - Overrun timer at low speed



**MHY** - Smart Humidity control automatic progressive increase/decrease of fan speed according to the percentage of R.H.




**2V** - 24 hours running at the lowest speed



**EC VERSIONS** - See pag. 71

## DIMENSIONS (mm)

| MODELS       | A   | ØB  | C   | D  | Kg  |
|--------------|-----|-----|-----|----|-----|
| ELEGANCE 100 | 160 | 98  | 80  | 38 | 0,9 |
| ELEGANCE 120 | 180 | 119 | 91  | 44 | 1,1 |
| ELEGANCE 150 | 200 | 149 | 105 | 56 | 1,3 |

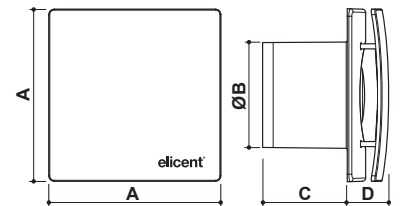

## CURVES

